
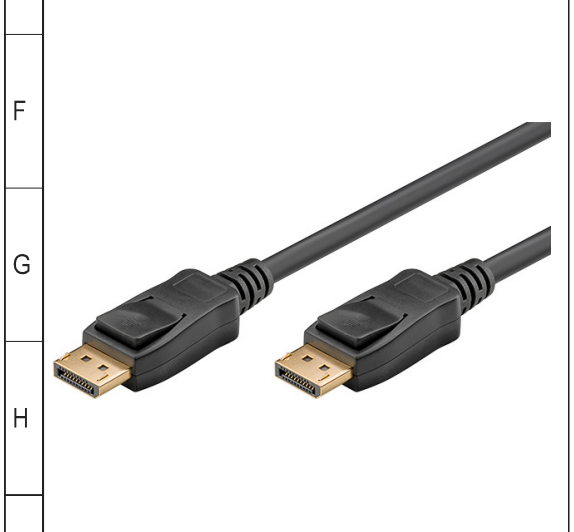
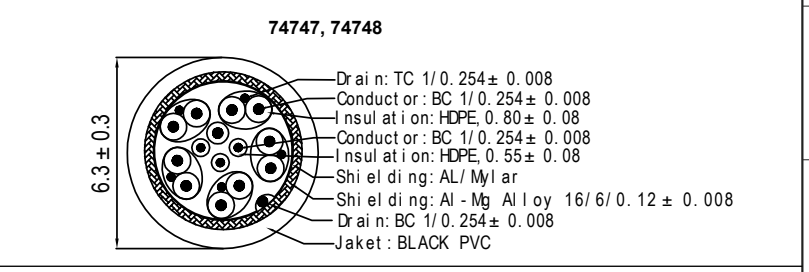


Pin-Belegung / Pin Assignment

P1	P2	10	3
1	12	12	1
3	10	11	2
2	11	13	13
4	9	14	14
6	7	15	15
5	8	17	17
7	6	16	16
9	4	18	18
8	5	19	19

PAIR SHELL BRAID SHELL
 DRAIN WIRE OF PAIR

Art.-Nr. / Item No.	Beschreibung / Description	Länge / Length (L)
74747	DP 2.0 Kabel STD 0100 1,0m sw 40GB	1000 ± 30 mm
74748	DP 2.0 Kabel STD 0200 2,0m sw 40GB	2000 ± 30 mm
74749	DP 2.0 Kabel STD 0300 3,0m sw 40GB	3000 ± 50 mm
74750	DP 2.0 Kabel STD 0500 5,0m sw 40GB	5000 ± 70 mm

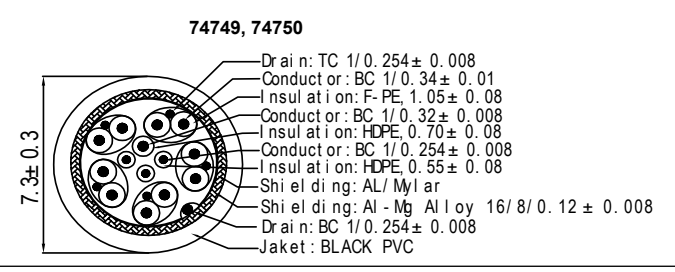

DisplayPort™ Verbindungskabel 2.0

- max. Datenübertragungsrate von bis zu 40 Gbit/s
- mit Staubschutzkappe

Anschlüsse: 2x DisplayPort™-Stecker
Kontakte: vergoldet
Kabeltyp: Rundkabel
Material Kabelmantel: PVC, schwarz
Außendurchmesser Kabel: 6,3 ± 0,3 mm (74747, 74748)
 7,3 ± 0,3 mm (74749, 74750)
Max. Datenübertragungsrate: 40 Gbit/s
Unterstützte Videostandards: 8K @ 60 Hz (7680 x 4320)
 4K @ 144 Hz (3840 x 2160)
 Full HD @ 240 Hz (1920x1080)
Isolationswiderstand: 300 V ===, 10 MΩ min.

DisplayPort™ Connector Cable 2.0

- max. data transmission rate of up to 40 Gbit/s
- with protective dust cap

Connections: 2x DisplayPort™ plug
Contacts: gold-plated
Cable type: round cable
Material cable Jacket: PVC, black
Outer diameter cable jacket: 6.3 ± 0.3 mm (74747, 74748)
 7.3 ± 0.3 mm (74749, 74750)
Max. Data transmission rate: 40 Gbit/s
Supported video standards: 8K @ 60 Hz (7680 x 4320)
 4K @ 144 Hz (3840 x 2160)
 Full HD @ 240 Hz (1920x1080)
Insulation resistance: 300 V ===, 10 MΩ min.

Änderungen		Datum	Name	Bezeichnung	Blatt
Datum	Name	gez.:	23.09.2024	DP 2.0 Kabel STD XXXX X,Xm sw 40GB	 1/1
		gepr.:	23.09.2024		
		Norm:			
Änderungen vorbehalten / Subject to change				Zeichnungs-Nr.:	von
				74747ff	